
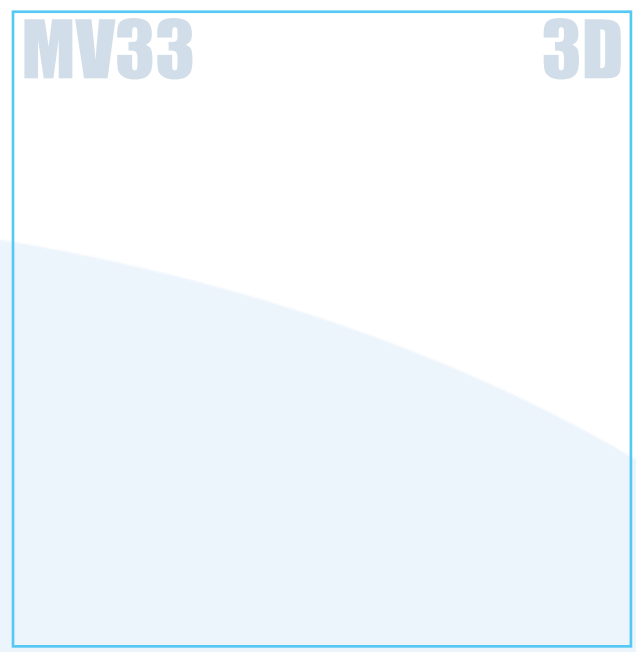


Material: Brass Nickel Plated
Working Temperature: -10 ÷ 70 C°
Working Temperature: F°
Working Pressure (max): 2 ÷ 10 bar
Working Pressure (max): psi
Vacuum: kPa
Vacuum: Hg
Conformity:

Conformity:
Conformity:
Conformity:
Conformity:
Application Pneumatic installations fed with filtered, lubricated air

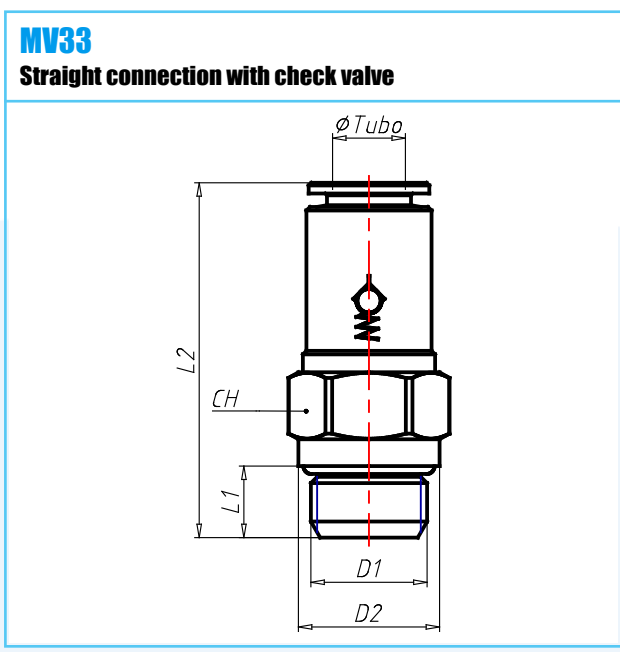

CODE	TIPO	TUBO	D1	D2	L1	L2	CH	G	CONF
4230010	MV33 04 M5	4	M5x0,8	8	4	37.5	9	11	RoHS
4230011	MV33 04 18	4	G1/8	13	6	31.0	11	14	RoHS
4230031	MV33 06 18	6	G1/8	13	6	38.0	13	21	RoHS
4230032	MV33 06 14	6	G1/4	16	8	39.0	14	27	RoHS
4230041	MV33 08 18	8	G1/8	13	6	39.0	15	25	RoHS
4230042	MV33 08 14	8	G1/4	16	8	40.0	16	30	RoHS
4230052	MV33 10 14	10	G1/4	16	8	43.0	18	37	RoHS
4230053	MV33 10 38	10	G3/8	20	9	43.0	18	43	RoHS
4230064	MV33 12 12	12	G1/2	25	10	47.0	22	68	RoHS
4230074	MV33 14 12	14	G1/2	25	10	54.0	25	85	RoHS