


LUP63

Pneumatic pin clamp

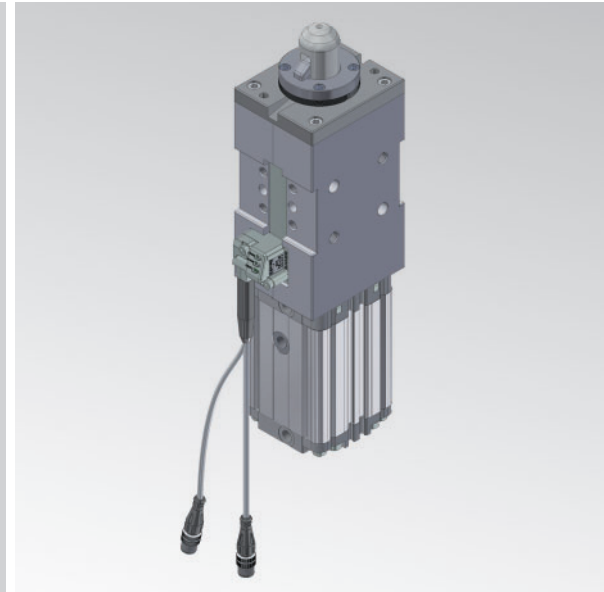

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| L | U | P | 6 | 3 | S | E | 3 | 1 | - | - | - |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | |

| | | |
|-----------------|------------------|---------------|
| 1 Series | 2 Version | 3 Size |
|-----------------|------------------|---------------|

LU = Pin clamp

P = Pneumatic-standard

63 = Ø 63 mm

| | | |
|----------------|-----------------|-----------------------|
| 4 Model | 5 Sensor | 6 Pin diameter |
|----------------|-----------------|-----------------------|

S = Vanishing hook and pin

E = DF-LUP sensor

1 ≤ Ø 19 mm

N = No sensor
(with protection plate)

2 = Ø 20 mm

3 = Ø 25 mm

4 = Ø 30 mm


5 = Ø 35 mm

6 = Ø 40 mm

| | |
|-----------------------|--------------------------------|
| 7 Locating pin | 8 Progressive numbering |
|-----------------------|--------------------------------|

1 = Locating pin included

Progressive numbers for special products are assigned by the Sales Dept.

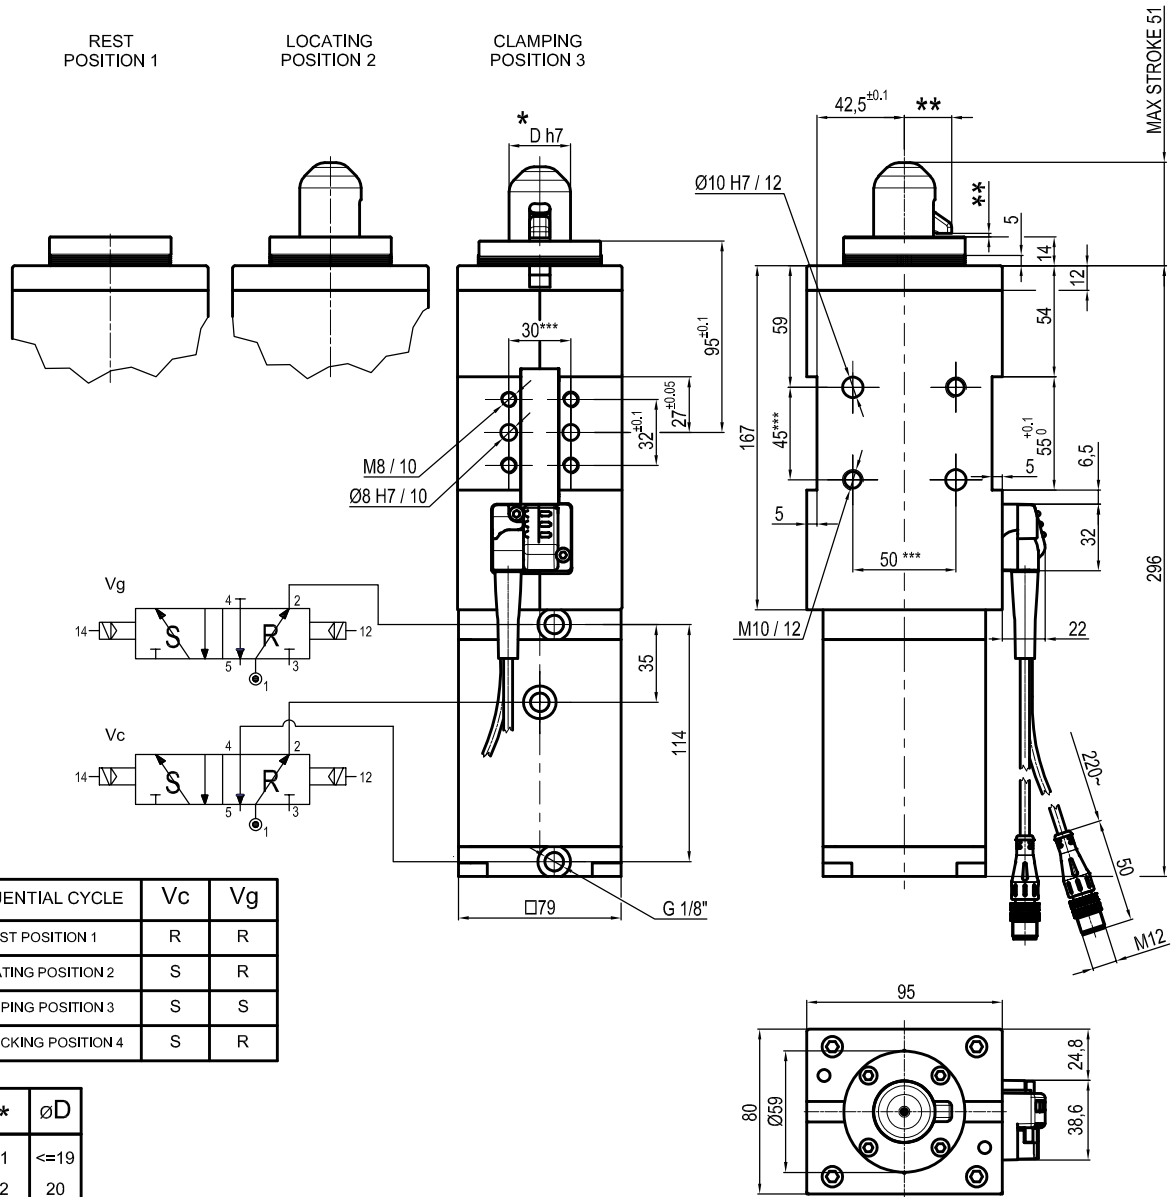

** : Missing dimension to be defined according to customer specifications

| Bore ∅ | Clamping force | Weight |
|--------|----------------|--------|
| 63 mm | 150 daN | 3 Kg |

Min./max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° + 45° C**
 Electronic sensor with n°2 cables with M12 connector
 Supply voltage: 10+30 Vdc
 IP code: **IP 54**

*** : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, BETWEEN SCREW HOLES ± 0.1

Subject to technical modifications without notice