
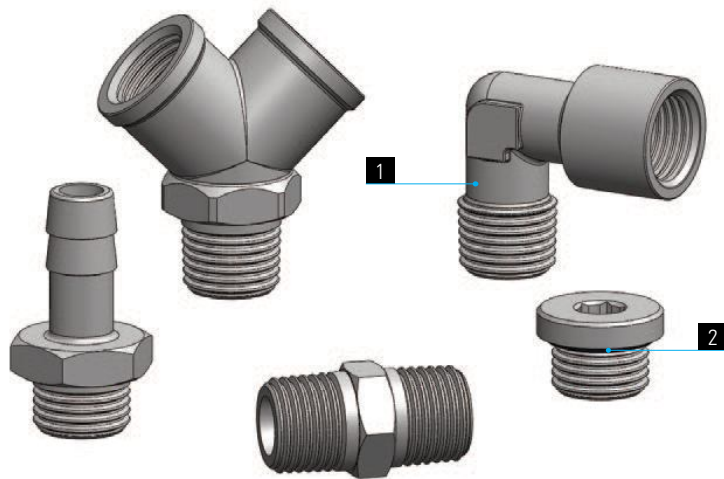


1	2
Corpo del raccordo Fitting Body Corps du raccord Verschraubungskörper	Guarnizioni Seals Joint d'étanchéité Dichtung
Ottone UNI EN 12164 CW614N - UNI EN 12165 CW617N Nichelato Brass UNI EN 12164 CW614N - UNI EN 12165 CW617N Nickel Plated Laiton UNI EN 12164 CW614N - UNI EN 12165 CW617N Nickelé Messing UNI EN 12164 CW614N - UNI EN 12165 CW617N vernickelt	NBR NBR NBR NBR

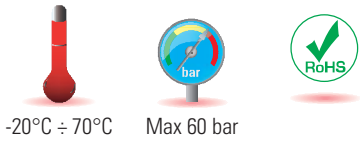

	M5x0,8	G1/8	G1/4	G3/8	G1/2	G3/4	G1"	R1/8	R1/4	R3/8	R1/2	R3/4	R1"
	●	●	●	●	●	●	●	●	●	●	●	●	●

Campi di applicazione:
 Impianti pneumatici, idraulici ed oleodinamici.

Application fields:
 Pneumatic, hydraulic and oleodynamic circuits.

Domaines d'application:
 Circuits pneumatiques, hydrauliques et oléodynamiques.

Anwendungsbereiche:
 Hydraulische, öldynamische und pneumatische Anlagen.


RA 22

Gomito M-F

Male-Female Elbow

Equerre Mâle-Femelle

Auf-Einschraub-Winkel



Tipo	D1	D2	L1	L2	L3	CH	g	⚖
22 18 18	R1/8	G1/8	8	18,5	21	10	19	
22 14 14	R1/4	G1/4	11	23,5	25,5	13	35	
22 38 38	R3/8	G3/8	11,5	26	28	17	50	
22 12 12	R1/2	G1/2	14	31	33,5	21	87	
22 34 34	R3/4	G3/4	16	33	36,5	25	126	
22 1" 1"	R1"	G1"	17	39	45	30	212	


RA 23

T F-F-F

Male-Female Stud Tee

Té Femelle-Mâle-Femelle

T Auf-Einschraub



Tipo	D1	L1	CH	g	⚖
23 18 18	G1/8	21	10	29	
23 14 14	G1/4	25,5	13	54	
23 38 38	G3/8	28	17	82	
23 12 12	G1/2	33,5	21	144	


RA 24

T F-M-F

Male-Female Stud Tee

Té Femelle-Mâle-Femelle

T Auf-Einschraub



Tipo	D1	D2	L1	L2	L3	CH	g	⚖
24 18 18	R1/8	G1/8	8	18,5	21	10	28	
24 14 14	R1/4	G1/4	11	23,5	25,5	13	48	
24 38 38	R3/8	G3/8	11,5	26	28	17	74	
24 12 12	R1/2	G1/2	14	31	33,5	21	122	
24 34 34	R3/4	G3/4	16	33	36,5	25	178	
24 1" 1"	R1"	G1"	17,5	39	45	30	304	


RA 25

T M-F-F

Male-Female, Lateral Tee

Té Mâle-Femelle-Femelle

T Ein-Aufschraub



Tipo	D1	D2	L1	L2	L3	L4	CH	g	⚖
25 18 18	R1/8	G1/8	8	18,5	21	39,5	10	28	
25 14 14	R1/4	G1/4	11	23,5	25,5	49	13	48	
25 38 38	R3/8	G3/8	11,5	26	28	54	17	74	
25 12 12	R1/2	G1/2	14	31	33,5	64,5	21	127	