


Flanged Ballscrew Housing

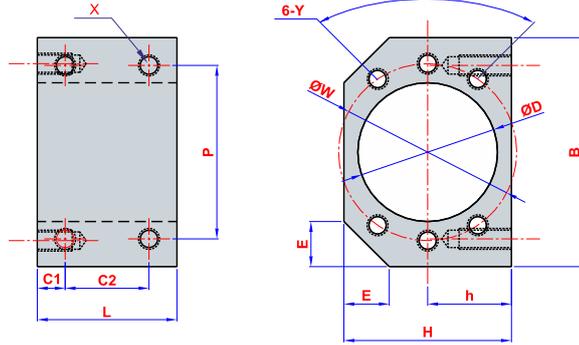


Code	Type	Dimensions (mm)											
		ØD	B	H	h	E	L	C1	C2	P	X	W	Y
4.007.08.1605	1605-1610	28	52	40	20	12	40	8	24	40	M5	38	M5
4.007.08.2005	2005-2010	36	62	44	22	12	40	8	24	48	M6	47	M6
4.007.08.2505	2505-2510	40	66	48	24	13	40	8	24	50	M6	51	M6
4.007.08.3205	3205-3210	50	86	62	31	17	40	8	24	66	M8	65	M8
4.007.08.4005	4005-4010	63	100	70	35	19	38	8	24	80	M8	78	M8
4.007.08.1616	1616	32	54	38	19	8	40	8	24	44	M5	42	M4
4.007.08.2020	2020	39	64	46	23	11	40	8	24	52	M6	50	M5
4.007.08.2525	2525	47	68	56	28	9	40	8	24	50	M6	60	M6

Preferred Using Areas

It is a part which is bedding for flanged ballscrew nuts. Through this part, flanged nut can be connected to the different surface as desired as proper to the design.

MOTOR CONNECTION FLANGES (WITH HOLE / WITHOUT HOLE)

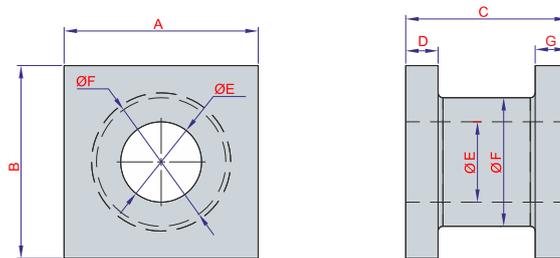

Ölçüler							
KOD	A	B	C	D	G	E	F
5.3.004545	45	45	67	10	10	35	45
5.3.006060	60	60	73	12	12	35	50
5.3.008585	85	85	90	15	15	47	60
5.3.009595	95	95	104	24	17	47	72
5.3.120120	120	120	100	20	20	50	80

Preferred Using Areas

It is a part which is manufactured of aluminium casting and provide connecting the motor to the module or machineries by couplings. there are different sizes according to the power or type of the motor