





**FLANGED DISC COUPLINGS ( SINGLE )**



Code	Type	Dimensions (mm)						Max Angular Misalignment (°)	Max Axial Misalignment (mm)	Max Torque (Nm)	Max rpm
		Inside Dia d min	Inside Dia d max	Outside Dia D	Length L	L1-L2	M				
4.005.02.042.09	SDS-42C	6	15	42,5	30,8	13,4	3	1	0	14	8.000
4.005.02.047.09	SDS-47C	8	19	47	37	16,7	4	1	0	24	8.000
4.005.02.054.09	SDS-54C	10	20	54	47,1	21,4	5	1	0	44	8.000
4.005.02.064.09	SDS-64C	12	22	64	58,2	26	6	1	0	62	7.000
4.005.02.080.09	SDS-80C	15	32	80	66,1	29,7	8	1	0	150	7.000

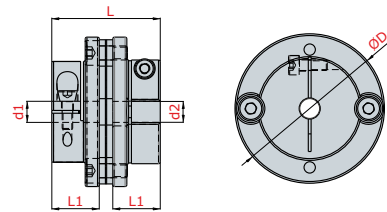

**FLANGED DISC COUPLINGS ( DOUBLE )**

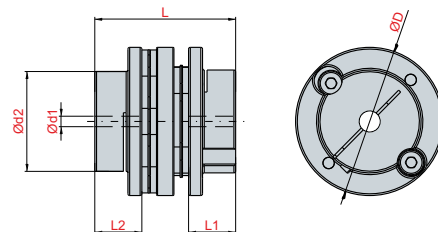

Code	Type	Dimensions (mm)						Max Angular Misalignment (°)	Max Axial Misalignment (mm)	Max Torque (Nm)	Max rpm
		Inside Dia d min	Inside Dia d max	Outside Dia D	Length L	L1-L2	M				
4.005.02.042.10	SDWA-42C	6	17	42,5	39,7	13,4	3	1,5	0,18	14	8.000
4.005.02.047.10	SDWA-47C	8	20	47	45,6	16,7	4	1,5	0,2	24	7.500
4.005.02.054.10	SDWA-54C	10	25	54	60,6	21,4	5	1,5	0,2	44	7.500
4.005.02.064.10	SDWA-64C	12	24	64	74,4	26	6	1,5	0,3	62	6.500
4.005.02.080.10	SDWA-80C	15	32	80	98,3	29,7	8	2	0,5	150	6.000