




General Specifications

Used as transmission element of circular motion for applications requiring high moment and sensitive positioning.  
 Often preferred on robot axes since they run at a void ration of zero level.  
 Other areas of use include shelf systems, pick-place operations, welding and assembly robots.

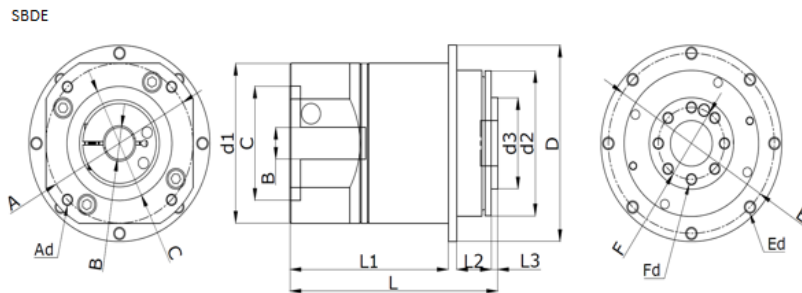

Stock Code	Stock Name	Series	A	B	C	D	d1	d2	d3	E	F	G	H	L	L1	L2	L3
4.008.02.02.050.010	CYCLOID Reducer	SBDE 50 i:10	46	8	30	72	52	47	28	67	20	-	-	79	55,5	16,5	3
4.008.02.02.070.010	CYCLOID Reducer	SBDE 70 i:10	70	14	50	86	70	64	40	79	31,5	-	-	98,8	75,3	16,5	3
4.008.02.02.090.010	CYCLOID Reducer	SBDE 90 i:10	90	16	70	118	118	90	63	107	50	-	-	120	83,6	24	5,5