


General Specifications

Special rollers, developed for miniature conveyors made of 45*45 profile, are designed in coherence with motors and reducers that ensure belt motion.
See the table below for standard drum sizes.

Stock Code	Stock Name	Belt Width	A	B	L	L1	ØD	Ød	Weight (gr)	Material
3.008.02.045.045.01	Ø45 Knurled Drive Drum	40	25	45	140	43	50	14	270	Aluminium
3.008.02.045.090.01	Ø45 Knurled Drive Drum	85	25	45	185	88	50	14	380	Aluminium
3.008.02.045.135.01	Ø45 Knurled Drive Drum	130	25	45	230	133	50	14	470	Aluminium
3.008.02.045.150.01	Ø45 Knurled Drive Drum	150	25	45	253	156	50	14	510	Aluminium
3.008.02.045.180.01	Ø45 Knurled Drive Drum	175	25	45	275	178	50	14	550	Aluminium
3.008.02.045.200.01	Ø45 Knurled Drive Drum	200	25	45	303	206	50	14	610	Aluminium
3.008.02.045.300.01	Ø45 Knurled Drive Drum	300	25	45	403	306	50	14	790	Aluminium
3.008.02.045.450.01	Ø45 Knurled Drive Drum	450	25	45	553	456	50	14	1070	Aluminium

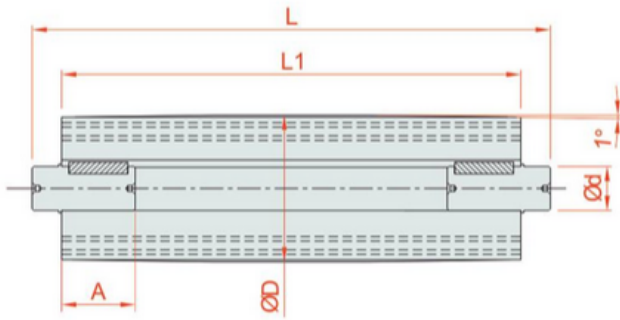

General Specifications

These drums rotate and stretch the belt on miniature conveyors made of profile of 45*45.
See the table below for standard drum sizes.

Stock Code	Stock Name	Belt Width	A	L	L1	ØD	Ød	Weight (gr)	Material
3.008.01.045.045.01	Ø45 Knurled Tension Drum	40	25	63	43	50	15	170	Aluminium
3.008.01.045.090.01	Ø45 Knurled Tension Drum	85	25	108	88	50	15	260	Aluminium
3.008.01.045.135.01	Ø45 Knurled Tension Drum	130	25	153	133	50	15	350	Aluminium
3.008.01.045.150.01	Ø45 Knurled Tension Drum	150	25	176	156	50	15	390	Aluminium
3.008.01.045.180.01	Ø45 Knurled Tension Drum	175	25	198	178	50	15	430	Aluminium
3.008.01.045.200.01	Ø45 Knurled Tension Drum	200	25	226	206	50	15	490	Aluminium
3.008.01.045.300.01	Ø45 Knurled Tension Drum	300	25	326	306	50	15	607	Aluminium
3.008.01.045.450.01	Ø45 Knurled Tension Drum	450	25	476	456	50	15	950	Aluminium