
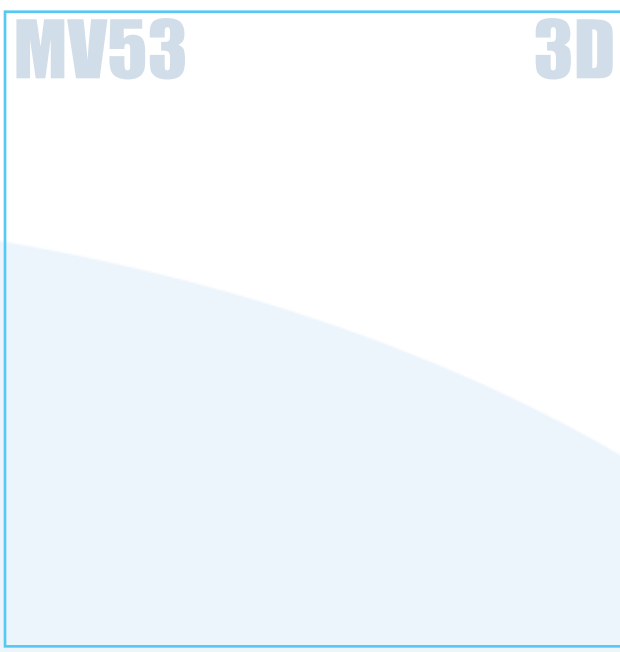


**Material:** Brass Chrome Plated  
**Working Temperature:** -20 ÷ 90 C°  
**Working Temperature:** F°  
**Working Pressure (max):** 0 ÷ 10 bar  
**Working Pressure (max):** psi  
**Vacuum:** kPa  
**Vacuum:** Hg  
**Conformity:**

**Conformity:**  
**Conformity:**  
**Conformity:**  
**Conformity:**  
**Application** Pneumatic installations fed with filtered, lubricated air

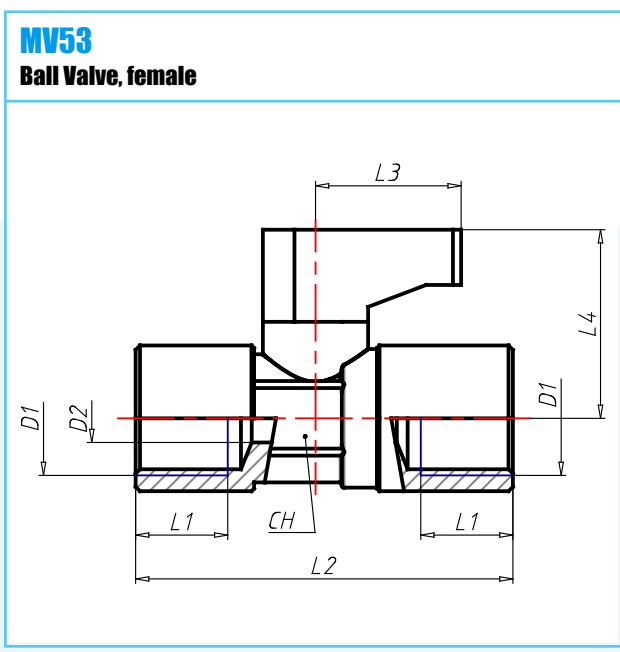

CODE	TIPO	D1	D2	L1	L2	L3	L4	CH	G	CONF
4430001	MV53 00 18	G1/8	5.5	8.0	36.5	19	21.5	14	36.6	RoHS
4430002	MV53 0014	G1/4	5.5	11.0	43.0	19	21.5	14	49.0	RoHS
4430003	MV53 00 38	G3/8	8.0	10.5	43.0	24	24.0	17	56.0	RoHS
4430004	MV53 00 12	G1/2	10.0	12.0	49.0	34	27.0	21	93.2	RoHS