
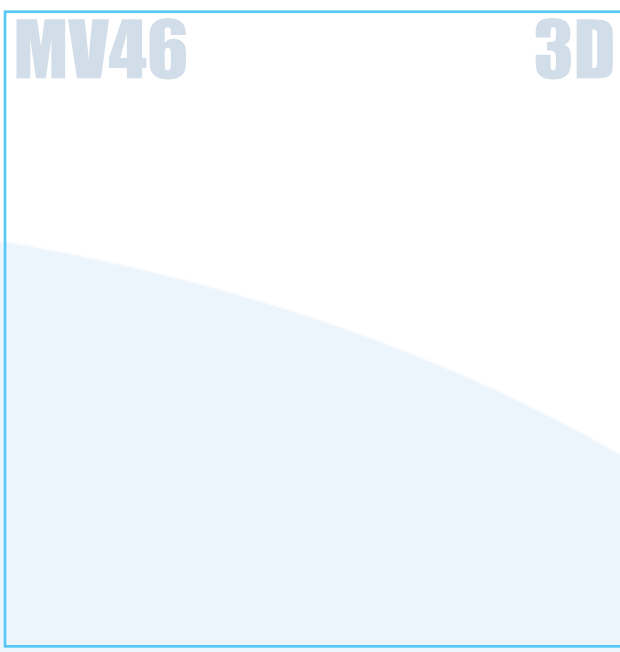


**Material:** Brass Nickel Plated  
**Working Temperature:** 0 ÷ 70 C°  
**Working Temperature:** F°  
**Working Pressure (max):** 15 bar  
**Working Pressure (max):** psi  
**Vacuum:** kPa  
**Vacuum:** Hg  
**Conformity:**

**Conformity:**  
**Conformity:**  
**Conformity:**  
**Conformity:**  
**Application** Pneumatic installations fed with filtered, lubricated air

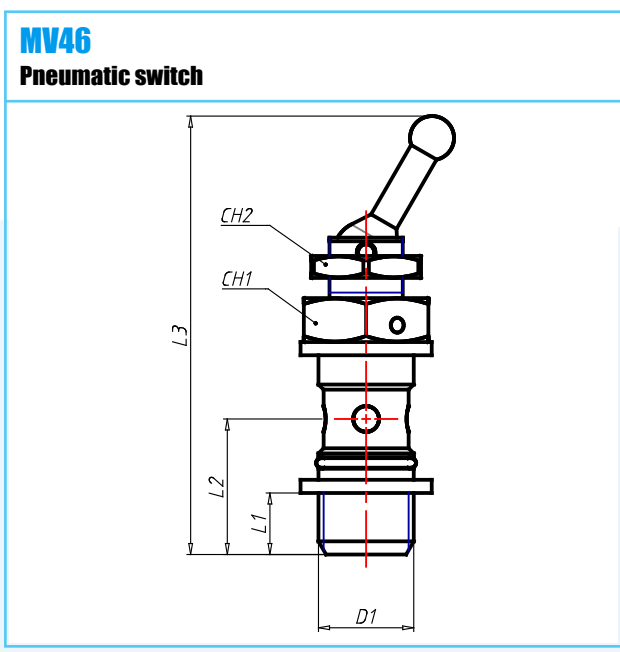

CODE	TIPO	D1	L1	L2	L3	CH1	CH2	G	VER	CONF
04360001-2	MV46 00 18	G1/8	6	16	55	14	15	25	2/2 way	RoHS
04360001-3	MV46 00 18	G1/8	6	16	55	14	15	25	3/2 way	RoHS
04360002-2	MV46 00 14	G1/4	8	19	60	17	15	41	2/2 way	RoHS
04360002-3	MV46 00 14	G1/4	8	19	60	17	15	41	3/2 way	RoHS