
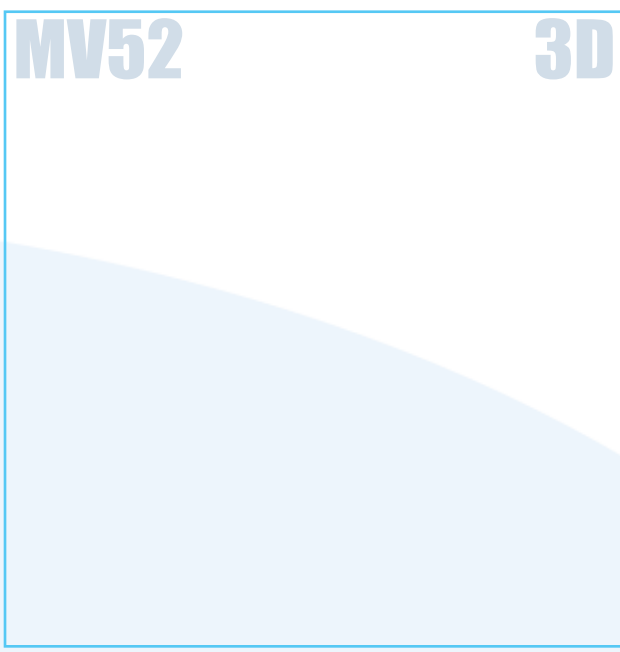


**Material:** Brass Nickel Plated  
**Working Temperature:** 0 ÷ 70 C°  
**Working Temperature:** F°  
**Working Pressure (max):** 0 ÷ 10 bar  
**Working Pressure (max):** psi  
**Vacuum:** kPa  
**Vacuum:** Hg  
**Conformity:**

**Conformity:**  
**Conformity:**  
**Conformity:**  
**Conformity:**  
**Application** Pneumatic installations fed with filtered, lubricated air

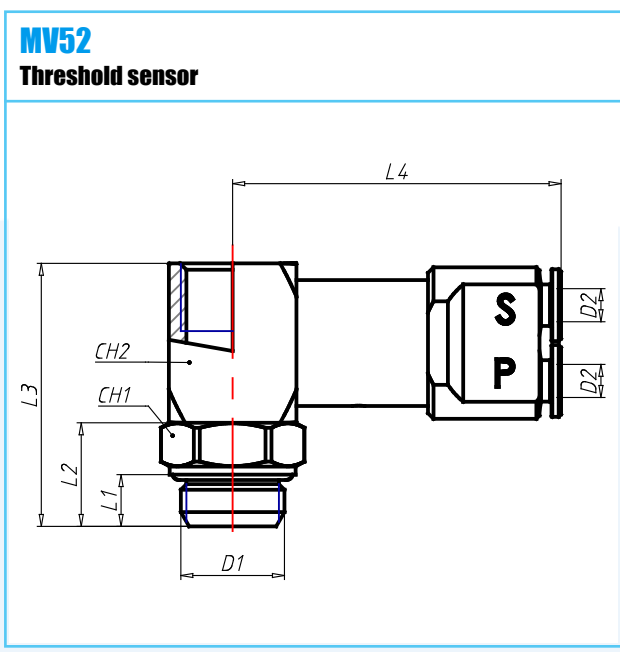

CODE	TIPO	D1	D2	D3	L1	L2	L3	L4	CH1	CH2	G	CONF
4420001	MV52 00 18	G1/8	4	G1/8	5.0	11	29.5	38	13	16	69	RoHS
4420002	MV52 00 14	G1/4	4	G1/4	6.5	13	33.0	40	16	16	79	RoHS
4420003	MV52 00 38	G3/8	4	G3/8	7.0	13	33.0	42	20	20	98	RoHS