
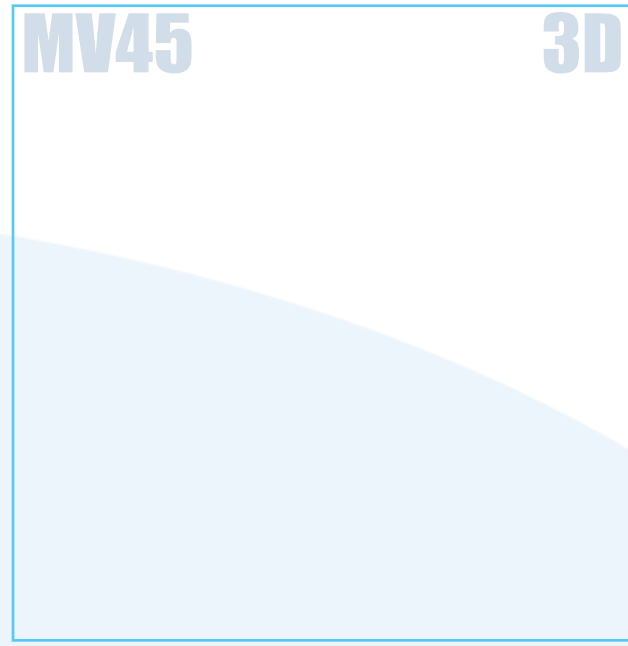


Material: Brass Nickel Plated
Working Temperature: -5 ÷ 70 C°
Working Temperature: F°
Working Pressure (max): 10 bar
Working Pressure (max): psi
Vacuum: kPa
Vacuum: Hg
Conformity:

Conformity:
Conformity:
Conformity:
Conformity:
Application Pneumatic installations fed with filtered, lubricated air

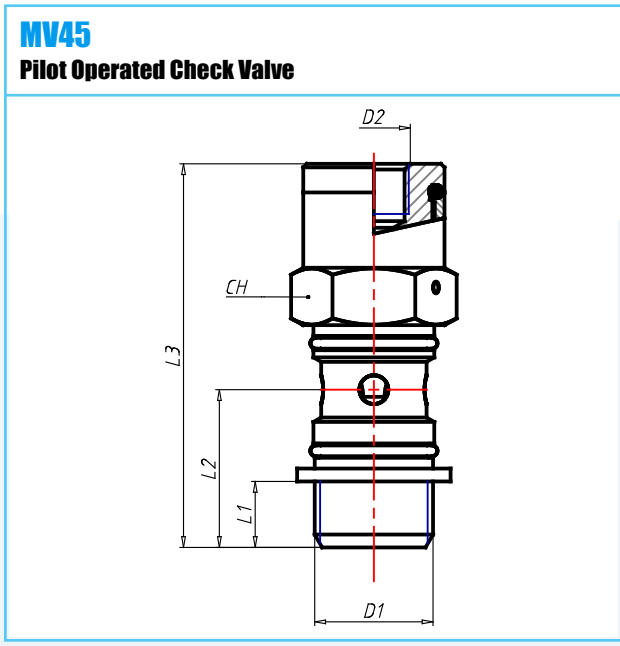

CODE	TIPO	D1	D2	L1	L2	L3	CH1	G	FLOW	CONF
04350B01	MV45 00 18	G1/8	M5x0,8	6	15.5	42.0	13	24	BID	RoHS
04350B02	MV45 00 14	G1/4	M5x0,8	8	18.5	47.0	17	47	BID	RoHS
04350B03	MV45 00 38	G3/8	G1/8	9	21.0	53.5	20	78	BID	RoHS
04350B04	MV45 00 12	G1/2	G1/8	10	24.5	60.0	25	139	BID	RoHS
04350U01	MV45 00 18	G1/8	M5x0,8	6	15.5	42.0	13	24	UNI	RoHS
04350U02	MV45 00 14	G1/4	M5x0,8	8	18.5	47.0	17	47	UNI	RoHS
04350U03	MV45 00 38	G3/8	G1/8	9	21.0	53.5	20	78	UNI	RoHS
04350U04	MV45 00 12	G1/2	G1/8	10	24.5	60.0	25	139	UNI	RoHS