



## TIMER TIMER

M8/M12

DIN 43650

EXTENSIONS  
PROLUNGHE

FUSE HOLDERS  
PORTAFUSIBILI

AUTOMOTIVE

M8/M12  
DISTRIBUTION  
BOXES  
SCATOLE DI  
DISTRIBUZIONE  
M8/M12


7/8"

INDUSTRIAL  
CONNECTORS  
CONNETTORI  
INDUSTRIALI

EN 175 000

ACCESSORIES  
ACCESSORI

SENSOR  
SWITCHES  
SENSORI

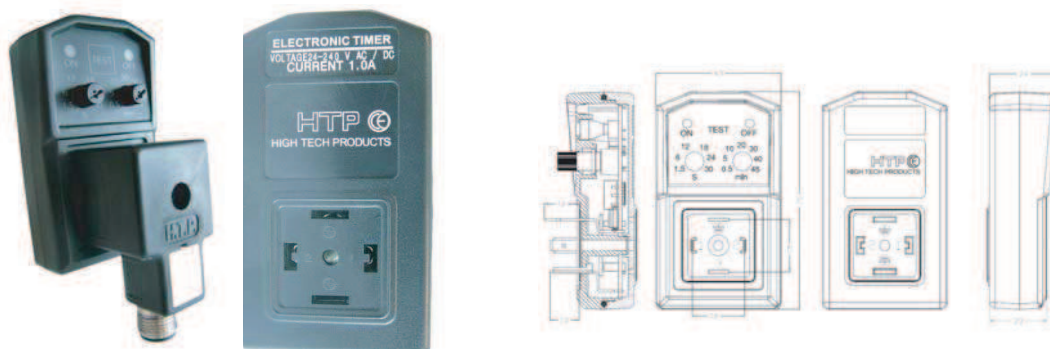

### PRODUCT DESCRIPTION

Timer for DIN 43650 connectors  
Type of contact: female  
Number of contacts: 2 poles + earth  
Standard: IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2  
Housing Color: black

### TECHNICAL DATA

Rated voltage: 24 - 240V AC/DC  $\pm$  10% 50/60 Hz  
Rated current: 1 A  
Current consumption: 4 mA max  
Connection: DIN 43650-A/ISO 4400  
Off time: 0,5-45 min  
On time: 1,5 -30 sec  
Scale accuracy:  $\pm$  10%  
Indicators: red Led - on phase / red Led - off phase

### MATERIALS

Housing material: Nylon 6 + 30% Glass fibre

### ENVIRONMENTAL CONDITIONS

Protection class (IEC 60529): IP 65  
Temperature range: -40°C to +60°C

### PACKAGING

Carton box (1 piece)

### DESCRIZIONE PRODOTTO

Timer per connettore DIN 43650  
Tipo di contatto: femmina  
Numero contatti: 2 poli + terra  
Standard: IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2  
Colore custodia: nera

### DATI TECNICI

Tensione Oper: 24 - 240V AC/DC  $\pm$  10% 50/60 Hz  
Corrente operativa: 1 A  
Corrente assorbita: 4 mA max  
Connessione: DIN 43650-A/ISO 4400  
Tempo di pausa: 0,5-45 min  
Tempo di lavoro: 1,5 -30 sec  
Precisione:  $\pm$  10%  
Indicatori: Led rosso-fase on/Led rosso-fase off

### MATERIALI

Materiale custodia: Nylon 6 + 30% fibra di vetro

### CONDIZIONI AMBIENTALI

Grado di protezione (IEC 60529): IP 65  
Range di temperatura: -40°C to +60°C

### IMBALLAGGIO:

Scatola di cartone (1 pezzo)