





BELLOWS COUPLING



Code	Type	Dimensions (mm)						Max Angular Offset (°)	Max Axial Offset (mm)	Max Torque (Nm)	Max rpm (rpm)
		Inside Dia d min	Inside Dia d max	Outside Dia D	Lenght L	L1-L2	M				
4.005.02.016.01	BW-16C	4	8	16	30	10,5	3	1,5	0,3	1,6	18.000
4.005.02.020.01	BW-20C	5	12	20	33	12,5	3	2,0	0,35	3	13.000
4.005.02.025.01	BW-25C	5	12	25	38	14	3	2,0	0,4	4	14.000
4.005.02.032.01	BW-32C	6	16	32	43	13,5	4	2,0	0,5	5	10.000
4.005.02.040.01	BW-40C	8	20	40	62	21	5	2,0	0,6	20	8.000
4.005.02.055.01	BW-55C	10	30	55	74	23	6	2,0	0,8	50	6.000
4.005.02.065.01	BW-65C	12	38	65	81	25,5	8	2,0	0,8	120	4.500
4.005.02.082.01	BW-82C	14	42	82	103	34,5	8	2,0	1,0	160	4.000

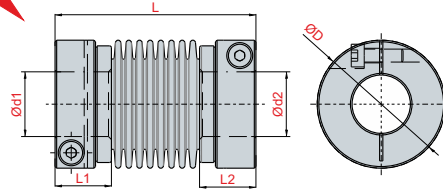

HUB CLAMPING SERVO COUPLING

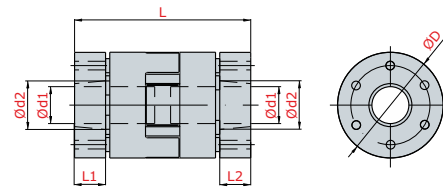

Code	Type	Dimensions (mm)						Max Angular Offset (°)	Max Axial Offset (mm)	Max Torque (Nm)	Max rpm (rpm)
		Inside Dia d min	Inside Dia d max	Outside Dia D	Lenght L	L1-L2	M				
4.005.02.030.03	JM-30T	6	14	30	50	8	3	0,9	+1,0,-1,0	25	25.000
4.005.02.040.03	JM-40T	10	20	40	66	12	4	0,9	+1,2,-1,0	34	16.500
4.005.02.055.03	JM-55T	11	28	55	78	15	5	0,9	+1,4,-1,0	120	12.200
4.005.02.065.03	JM-65T	15	38	65	90	17	5	0,9	+1,5,-1,4	320	10.500
4.005.02.080.03	JM-80T	20	45	80	114	24	6	0,9	+1,8,-1,4	650	8.650