




General Specifications

Preferred in drive systems requiring speed and moment.
 Helical types offer lower void tolerance and better clutch than plain rack series.
 See technical documents for proslot material details and mechanical features.

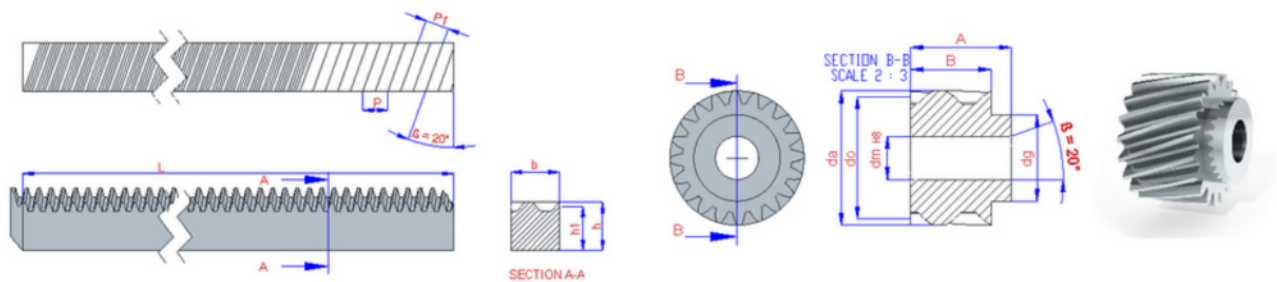


Stock Code	Stock Name	Module	L	P	P1	b	h	h1	Number of Teeth (t)	A	B	da	do	dm	dg
4.006.03.01.10.00	Helical Rack Right Gear	1	2000	3.343	3.142	15	15	14	-	-	-	-	-	-	-
4.006.04.01.10.22	Helical Pinion Gear	1	-	-	-	-	-	-	22	25	15	25,4	23,41	8	20
4.006.04.01.10.24	Helical Pinion Gear	1	-	-	-	-	-	-	24	25	15	27,5	25,5	8	22
4.006.04.01.10.25	Helical Pinion Gear	1	-	-	-	-	-	-	25	25	15	28,6	26,6	8	23
4.006.03.01.15.00	Helical Rack Right Gear	1,5	2000	5.015	4.712	17	17	15,5	-	-	-	-	-	-	-
4.006.04.01.15.22	Helical Pinion Gear	1,5	-	-	-	-	-	-	22	30	17	38,1	35,12	10	29
4.006.04.01.15.24	Helical Pinion Gear	1,5	-	-	-	-	-	-	24	30	17	41,3	38,31	10	33
4.006.04.01.15.25	Helical Pinion Gear	1,5	-	-	-	-	-	-	25	30	17	42,9	39,91	10	34
4.006.03.01.20.00	Helical Rack Right Gear	2	2000	6.686	6.283	20	20	18	-	-	-	-	-	-	-
4.006.04.01.20.22	Helical Pinion Gear	2	-	-	-	-	-	-	22	35	20	50,8	46,82	12	39
4.006.04.01.20.24	Helical Pinion Gear	2	-	-	-	-	-	-	24	35	20	55,1	51,08	12	43

General Specifications

Preferred in drive systems requiring speed and moment.

Helical types offer lower void tolerance and better clutch than plain rack series.

See technical documents for proslot material details and mechanical features.

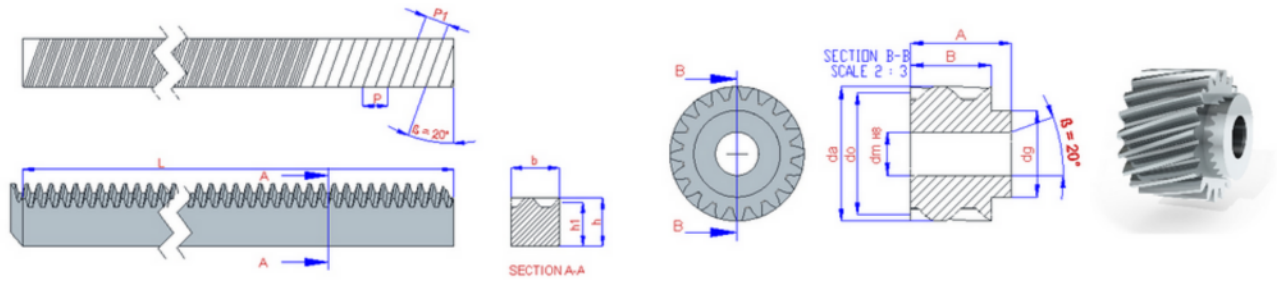

Stock Code	Stock Name	Module	L	P	P1	b	h	h1	Number of Teeth (t)	A	B	da	do	dm	dg
4.006.04.01.20.25	Helical Pinion Gear	2	-	-	-	-	-	-	25	35	20	57,2	53,21	12	46
4.006.03.01.25.00	Helical Rack Right Gear	2,5	2000	8.358	7.854	25	25	22,5	-	-	-	-	-	-	-
4.006.04.01.25.22	Helical Pinion Gear	2,5	-	-	-	-	-	-	22	40	25	63,5	58,53	14	49
4.006.04.01.25.24	Helical Pinion Gear	2,5	-	-	-	-	-	-	24	40	25	68,9	63,85	14	55
4.006.04.01.25.25	Helical Pinion Gear	2,5	-	-	-	-	-	-	25	40	25	71,5	66,51	14	57
4.006.03.01.30.00	Helical Rack Right Gear	3	2000	10.029	9.425	30	30	27	-	-	-	-	-	-	-
4.006.04.01.30.22	Helical Pinion Gear	3	-	-	-	-	-	-	22	50	30	76,2	70,24	12	60
4.006.04.01.30.24	Helical Pinion Gear	3	-	-	-	-	-	-	24	50	30	82,6	76,62	12	66
4.006.04.01.30.25	Helical Pinion Gear	3	-	-	-	-	-	-	25	50	30	85,8	79,81	12	69
4.006.03.01.40.00	Helical Rack Right Gear	4	2000	13.372	12.566	40	40	36	-	-	-	-	-	-	-
4.006.04.01.40.22	Helical Pinion Gear	4	-	-	-	-	-	-	22	60	40	101,6	93,65	14	80
4.006.04.01.40.24	Helical Pinion Gear	4	-	-	-	-	-	-	24	60	40	110,2	102,16	16	89
4.006.04.01.40.25	Helical Pinion Gear	4	-	-	-	-	-	-	25	60	40	114,4	106,42	16	93